# BLAUPUNKT



Enjoy it.









# DARK STEEL

The Dark Steel series presents itself in a coherent and consistent design. The appliances are carefully aligned to create you a comfortable kitchen space. Ovens and compact appliances can be combined in various ways – along clear, uniform lines of design with black glass and white displays.



Heat 11

### **Built-in oven**

# 5B50P 8690AU New



- Voltage: 220 240 V
- Total connected load: 3.2 kW

Built-in electric oven with 12 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Circulation
- Circulation grill • Vario large area grill
- Vario small area grill • Pizza level
- Defrost function
- Dough process
- Air Fry function

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Quick heating
- Temperature recommendation
- Electronic temperature regulation from 30 °C 250 °C
- Pyrolytic self-cleaning
- Full glass inner door
- Soft-moving door
- Dark Steel metal handle with logo
- Cooking chamber volume 721
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Child protection, door lock in pyrolysis mode
- Cooling fan
- Large oven interior with 1-way telescopic extension

- Combination grate
- Enamelled baking tray
- Temperature sensor
- Air Fry insert

- Appliance dimensions: 59.5 × 59.5 × 56.5 cm
- Installation dimensions: 60.0 × 56.0 × 55.0 cm
- Panel height: 96 mm



### **Built-in oven**



- Voltage: 220 240 V
- Total connected load: 3.2 kW

Oven type, heating type
Built-in electric oven with 11 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Circulation Circulation grill
- Vario large area grill
- Vario small area grill
- Pizza level
- Defrost function
- Dough process

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Quick heating
- Temperature recommendation
- Electronic temperature regulation from 30  $^{\circ}\text{C}$  250  $^{\circ}\text{C}$
- Pyrolytic self-cleaningFull glass inner door
- Soft-moving door
- Dark Steel metal handle with logo
- Cooking chamber volume 721
- Flat oven walls with oven racks
- Enamelled cooking chamber

- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Child protection, door lock in pyrolysis mode
- Cooling fan
- Large oven interior with 1-way telescopic extension

- Combination grate
- Enamelled baking tray

- Dimensions H × W × D

   Appliance dimensions: 59.5 × 59.5 × 56.5 cm
- Installation dimensions:  $60.0 \times 56.0 \times 55.0$  cm
- Panel height: 96 mm



### Built-in oven

# 5B50N 8690AU New















- Voltage: 220 240 V
- Total connected load: 2.9 kW

Oven type, heating type
Built-in electric oven with 12 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Circulation Circulation grill
- Vario large area grill Vario small area grill
- Pizza level
- Defrost function
- Dough process Air Fry function

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Quick heating
- Temperature recommendation
- Electronic temperature regulation from 30 °C 250 °C
- Full glass inner door
- Soft-moving door
- Dark Steel metal handle with logo
- Cooking chamber volume 721
- Flat oven walls with oven racks Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Child protection, door lock in pyrolysis mode Cooling fan
- Large oven interior with 1-way telescopic extension

- Combination grate
- Enamelled baking tray
- Temperature sensor
- Air Fry insert

- Appliance dimensions: 59.5 × 59.5 × 56.5 cm
- Installation dimensions: 60.0 × 56.0 × 55.0 cm • Panel height: 96 mm



### Built-in oven



- Voltage: 220 240 V
- Total connected load: 2.9 kW

# Built-in electric oven with 11 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco • Hot air
- Circulation
- Circulation grill • Vario large area grill
- Vario small area grill • Pizza level
- Defrost function Dough process
- Control panel in the Dark Steel design
- Touch Control • Smart Slider
- Digital display in white
- Ouick heating
- Temperature recommendation • Electronic temperature regulation from  $30\,^{\circ}\text{C} - 250\,^{\circ}\text{C}$
- Full glass inner door • Soft-moving door
- Dark Steel metal handle with logo
- Cooking chamber volume 721
- Flat oven walls with oven racks Enamelled cooking chamber
   Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off • Child protection, door lock in pyrolysis mode

• Large oven interior with 1-way telescopic extension

- Cooling fan

# • Enamelled baking tray

Combination grate

- Appliance dimensions:  $59.5 \times 59.5 \times 56.5 \, \text{cm}$
- Installation dimensions:  $60.0 \times 56.0 \times 55.0 \text{ cm}$
- Panel height: 96 mm









Dark Steel

# Combination steam cooker



- Voltage: 220 240 V
- Total connected load: 3.0 kW
- Grill output: 2,200 W / hot air output: 1,700 W

Compact oven with 13 heating types:

- Top/bottom heat
- Bottom heat • Hot Air Eco
- Hot air
- Circulation
- Circulation grill
- Vario large area grill
- Vario small area grill
- Pizza level
- Defrost function
- Dough process
- Steam cooking from 35°C 100°C
- Combined operation

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Push & pull water tank
- Temperature sensor
- Quick heating
- Temperature recommendation
- 16 automatic programmes
- Electronic temperature regulation from 30 °C 250 °C
- Full glass inner door
- Dark Steel metal handle with logo
- Cooking chamber volume 501
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- LED oven lightingSafety switch-off
- Child protection
- Cooling fan

- Combination grate
- Enamelled baking tray
- XL steam cooking container, perforated
- Temperature sensor

- Appliance dimensions:
- Installation dimensions:
- 45.0 × 56.0 × 55.0 cm
- Panel height: 96 mm





- Voltage: 220 230 V
- Total connected load: 3.3 kW
- 900 W Microwave
- Grill output: 1,200 W/hot air output: 1,750 W
- Steam cooker output: 1,500 W

- Heating types: hot air, circulation grill, area grill, microwave, combined operation, steam function
- 5 output levels: 900 W, 700 W, 450 W, 300 W, 100 W
- Maximum temperature circulation / hot air: 230 °C
- Maximum temperature circulation grill: 180 °C
- Maximum temperature steam cooker: 100 °C
- Maximum temperature steam cooker/hot air: 230°C

- Control panel made of glass and stainless steel
- 341 stainless steel cooking chamber
- 11 water tank volume for steam cooking function
- Metal handle
- Folding door
- Digital display
- Digital clock with day display
- All heating types can be used separately and in combination
- User-friendly electronics with touch control
- 10 defrost/cooking programmes with automatic weight adjustment
- Cook control 80 automatic programmes
- Child protection

- Appliance dimensions:  $45.4 \times 59.5 \times 52.5$  cm
- Installation dimensions:  $45.0 \times 56.0 \times 55.0$  cm
- Panel height: 96 mm

## **Warming drawer**









- Voltage: 220 240 V
- Total connected load: 0.4 kW

- Heating by fan heater
- Temperature regulation in 3 levels: from 30 °C 80 °C
- 20.5 l interior volume
- Rotary switch on inside

- Black glass front
- Opens without handles by push & pull
- Telescopic full extension
- Anti-slip mat
- Dish pre-heating
- Food warm-keeping function
- Defrosting of frozen food
- Load capacity 15 kg

- Appliance dimensions: 14.0 × 59.4 × 54.2 cm
- Installation dimensions:  $14.0 \times 56.0 56.8 \times 55.0$  cm



Heat







# OVENS

Crispy, delicate and fresh – all available with a simple touch! Intuitive operating concepts and clearly arranged display solutions allow your oven to produce perfect results. And when the feast is over, these practical kitchen appliances simply clean themselves.

## Built-in oven









- Voltage: 220 240 V
- Total connected load: 3.2 kW

Oven type, heating type
Built-in electric oven with 8 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Hot air grill
- Vario large area grill
- Vario small area grill
- Defrost function

- Fully retractable control knob
- Digital display Electronic clock
- Quick heating
- Temperature recommendation
- Pyrolytic self-cleaningFull glass inner door
- Metal handle
- Cooking chamber volume 701
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Child protection, door lock in pyrolysis mode
- Large oven interior with 1-way telescopic extension

- Appliance dimensions: 59.5 × 59.5 × 57.5 cm
   Installation dimensions: 59.0 × 56.0 × 55.0 cm
- Panel height: 96 mm

## Built-in oven







- Voltage: 220 240 V
- Total connected load: 3.0 kW

Oven type, heating type
Built-in electric oven with 8 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Hot air grill
- Vario large area grill
- Vario small area grill
- Defrost function

- Fully retractable control knob
- Electronic clock
- Quick heating
- Temperature recommendation
- Full glass inner door
- Metal handle
- Cooking chamber volume 701
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Cooling fan
- Large oven interior with 1-way telescopic extension

- Appliance dimensions: 59.5 × 59.5 × 57.5 cm
- Installation dimensions:  $59.0 \times 56.0 \times 55.0 \text{ cm}$
- Panel height: 96 mm

## Built-in oven









- Voltage: 220 240 V
- Total connected load: 3.0 kW

# Oven type, heating type Built-in electric oven with 8 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Hot air grill
- Vario large area grill
- Vario small area grill
- Defrost function

- Fully retractable control knob
- Digital display Electronic clock
- Quick heating
- Temperature recommendation
- Full glass inner doorMetal handle
- Cooking chamber volume 701
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lightingSafety switch-off
- Cooling fan
- Large oven interior with 1-way telescopic extension

- Appliance dimensions: 59.5 × 59.5 × 57.5 cm
- Installation dimensions:  $59.0 \times 56.0 \times 55.0 \text{ cm}$
- Panel height: 96 mm

## Built-in oven







- Voltage: 220 240 V
- Total connected load: 2.1 kW

Oven type, heating type
Built-in electric oven with 5 heating types:

- Hot Air
- Grill
- Grill with fan
- Defrosting
- ECO

- Temperature regulation from 50 °C 250 °C
- Full glass inner door
- Low window temperature
- Cooking chamber volume 701
- Smooth oven walls with suspended grates Metal handle
- Enamelled cooking chamber • Removable oven door for easy cleaning
- Oven lighting
- Cooling fan Control lamp for operation condition

- Appliance dimensions:  $59.5 \times 59.5 \times 57.5$  cm
- Installation dimensions:  $60.0 \times 57.0 \times 56.0 \, \text{cm}$
- Panel height: 120 mm









# Built-in oven











- Voltage: 220 240 V
- Total connected load: 2.8 kW

Oven type, heating type
Built-in electric oven with 9 heating types:

- Conventional
- Grill
- Double grill
- Double grill with fan
- Bottom heat
- Conventional with fan
- Hot air
- Defrost
- ECO

- Fully retractable control knob
- Temperature regulation from 50 °C 250 °C
- Full glass inner door
- Low window temperature
- Cooking chamber volume 931
- Smooth oven walls with suspended grates
- Metal handle
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Cooling fan
- Control lamp for operation condition

- Appliance dimensions:  $48.0 \times 90.0 \times 54.5$  cm
- Installation dimensions:  $47.5 47.7 \times 86.0 \times 55.0 56.0$  cm

# Built-in oven



- Voltage: 220 240 V
- Total connected load: 2.8 kW

Oven type, heating type
Built-in electric oven with 9 heating types:

- Conventional
- Grill
- Double grill
- Double grill with fan
- Bottom heat
- Conventional with fan
- Hot air
- Defrost
- ECO

- Mechanical control with digital timer
- Fully retractable control knob
- Temperature regulation from 50 °C 250 °C
- Full glass inner door
- Low window temperature
- Cooking chamber volume 931
- Smooth oven walls with suspended grates
- Metal handle
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Cooling fan
- Control lamp for operation condition

- Appliance dimensions:  $48.0 \times 90.0 \times 54.5$  cm
- Installation dimensions: 47.5 47.7 × 86.0 × 55.0 56.0 cm

## **Built-in compact microwave oven**



• Voltage: 230 – 240 V

• Grill Power: 1,100 W • Hot air Power: 2,300 W

• Connected load: 2.3 kW • 1,000 W Microwave

combination cooking

10 automatic programmesDefrost by weight/time

• Red LED Digital display 34 I stainless steel cavity31.5 cm glass turntable

Child safety lock

• Push open door

Touch control

Design, comfort

• Built-in appliance for a 60 cm wide tall cupboard

• 5 output levels: 1,000 W, 800 W, 500 W, 300 W, 100 W

• Appliance dimensions: 38.8 × 59.5 × 47.0 cm

• Installation dimensions:  $38.0 \times 56.0 \times 55.0$  cm

• Heating types: microwave, grill, hot air,











- Voltage: 230 240 V
- Connected load: 2.3 kW
- 1,000 W Microwave
- Grill Power: 1,100 W
- Hot air Power: 2,300 W

• Built-in microwave, stainless steel

**Built-in compact microwave oven** 

- Heating types:microwave, grill, hot air, combination cooking
- Knob and button control
- 5 output levels: 1,000 W, 800 W, 500 W, 300 W, 100 W 10 automatic programmes

Automatic

- Defrost by weight/time
- White LED digital display
- 34l stainless steel cavity
  31.5 cm glass turntable
- Child safety lock

- Appliance dimensions: 38.8 × 59.5 × 47.0 cm
- Installation dimensions:  $38.0 \times 56.0 \times 55.0$  cm











# Range Cooker











- Voltage: 220 240 V
- Total connected load: cooktop: 11.1 kW, oven: 2.94 kW

# Cooktop type, power Gas cooktop

- 5 SABAF burners with power:
- Central: 3.6 kW • Front left: 3.0 kW
- Rear left: 1.75 kW
- Front right: 1.0 kW
- Rear right: 1.75 kW

## Preset to natural gas (20 mbar)

- Can be converted to liquid gas (LPG nozzle is included in the package)
- Connection cable 1 m

# Built-in electric oven with 8 heating types:

- Hot air
- Bottom heat
- Conventional
- Convectional with fan
- Grill
- Double grill
- Double grill with fan
- Defrost

- Mechanical control with digital timer
- Full glass inner door
- Enamelled cooking chamber
- Cooking chamber volume: 1091
- Smooth oven walls with suspended grates
- Removable oven door for easy cleaningOven lighting

• Appliance dimensions:  $76.9 \times 89.5 \times 60.0 \, \text{cm}$ 

## Range Cooker











- Voltage: 220 240 V
- Total connected load: cooktop: 11.1 kW, oven: 2.94 kW

# Cooktop type, power Gas cooktop

5 SABAF burners with power:

- Central: 3.6 kW • Front left: 3.0 kW
- Rear left: 1.75 kW
- Front right: 1.0 kW
- Rear right: 1.75 kW

## Preset to natural gas (20 mbar)

- Can be converted to liquid gas (LPG nozzle is included in the package)
- Connection cable 1 m

Built-in electric oven with 8 heating types:

- Hot air
- Bottom heat
- Conventional
- Convectional with fan
- Grill
- Double grill
- Double grill with fan
- Defrost

- Mechanical control with digital timer
- Full glass inner door
- Enamelled cooking chamber
- Cooking chamber volume: 1091
- Smooth oven walls with suspended grates
- Removable oven door for easy cleaningOven lighting

• Appliance dimensions:  $76.9 \times 89.5 \times 60.0 \, \text{cm}$ 







Internation Infiliation

Not all heat is alike. Sometimes the temperature has to rise rapidly – boosting heat for perfect searing.

Other things need time – uniform heat for gentle cooking.

24

Heat

### Heat 25

### Stand-alone hob, combi induction

# 5II 94291AU















# **Output, consumption**


- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 5 induction cooking zones with booster:
- 2 cooking zones, combi induction  $\emptyset$  20.0 × 21.0 cm, 2.3 kW (3.0 kW)
- 2 cooking zones, combi induction Ø 20.0 × 21.0 cm, 2.3 kW (3.0 kW)
- 1 cooking zone Ø 21.5 cm, 2.3 kW (3.0 kW)

# Design, comfort


- Frameless
- Multi Control
- Smart Slider
- Touch Control
- 2× combi induction
- Flexible linking Any two cooking zones can be combined into one cooking zone
- Boost function for all induction cooking zones
- Grill function
- Electronic control in 10 power levels
- Digital display of cooking levels in white
- Residual heat display for each cooking zone
- Pot detection
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: 5.2 × 88.0 × 52.0 cm
- Installation dimensions: 5.2 × 81.0 × 49.0 cm



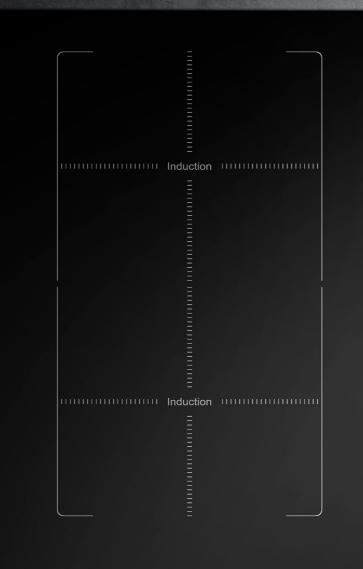

**●** BLAUPUNKT











# Stand-alone hob, induction




















- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 2 cooking zones Ø 17.5 cm, 1.4 kW (2.1 kW)
- 2 cooking zones Ø 21.5 cm, 2.3 kW (3.0 kW)

- Frameless
- Multi Control
- Smart Slider
- Touch Control
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Pot detection
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions:  $5.2 \times 78.0 \times 52.0$  cm
- Installation dimensions: 5.2 × 75.0 × 49.0 cm

# Stand-alone hob, induction




















- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 1 cooking zone Ø 15.5 cm, 1.4 kW (2.1 kW)
- 1 cooking zone Ø 15.5 cm, 1.4 kW (1.85 kW)
- 2 cooking zones Ø 21.5 cm, 2.3 kW (3.0 kW)
- Frameless
- Multi Control
- Smart Slider
- Touch Control
- Boost function for all induction cooking zones
- Electronic control in 10 power levels • Digital display of cooking levels
- Residual heat display for each cooking zone
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: 5.2 × 59.0 × 52.0 cm
- Installation dimensions: 5.2 × 56.0 × 49.0 cm





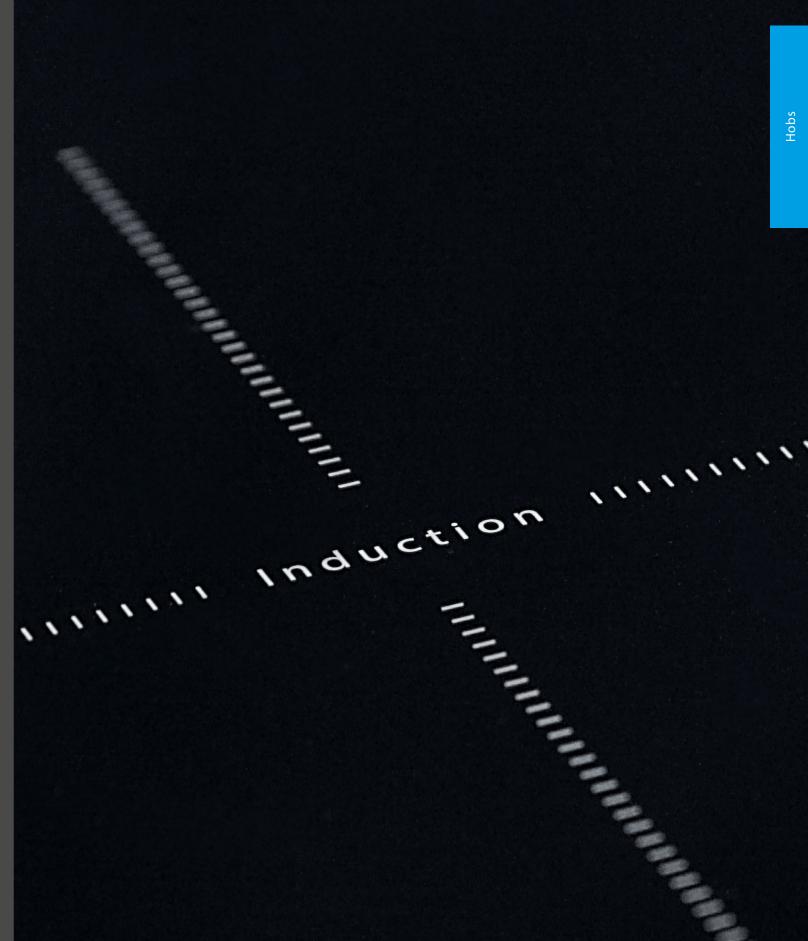

# Stand-alone hob

# 5RG 94350AU New



















- Voltage: 220 240 V
- Total connected load: 7.0 kW
- 4 high-speed cooking zones:
- 1 cooking zone Ø 14.5/22.0 cm, 1.0 kW (2.2 kW) double ring zone
- 1 cooking zone Ø 18.0/27.5 cm, 1.5 kW (2.4 kW) casserole zone
- 2 cooking zones Ø 15.5 cm, 1.2 kW

- Touch Control
- Sensor button for zone extension
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child lock • Timer – simultaneously adjustable for each cooking zone
- Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions:  $4.1 \times 90.0 \times 52.0$  cm
- Installation dimensions:  $4.1 \times 75.0 \times 49.0 \, \text{cm}$

# Stand-alone hob













- Voltage: 220 240 V
- Total connected load: 6.0 kW
- 4 high-speed cooking zones:
- 2 cooking zones Ø 15.5 cm, 1.2 kW
- 2 cooking zones Ø 19.0 cm, 1.8 kW

# Design, comfort • Frameless

- Touch Control
- Electronic control in 10 power levels
- Digital display of cooking levels
   Residual heat display for each cooking zone
- Child lock
- Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: 5.7 × 59.0 × 52.0 cm
   Installation dimensions: 5.7 × 56.0 × 49.0 cm

# Stand-alone hob













- Voltage: 220 240 V
- Total connected load: 3.0 kW
- 2 high-speed cooking zones:
- 1 cooking zone Ø 14.5 cm, 1.2 kW
- 1 cooking zone Ø 18.0 cm, 1.8 kW

# Design, comfort • Frameless


- Touch Control
- Electronic control in 9 power levels
- Digital display of cooking levels
  Residual heat display for each cooking zone
- Child lock
- Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions:  $5.7 \times 29.0 \times 52.0$  cm
- Installation dimensions:  $5.7 \times 27.0 \times 49.0 \, \text{cm}$







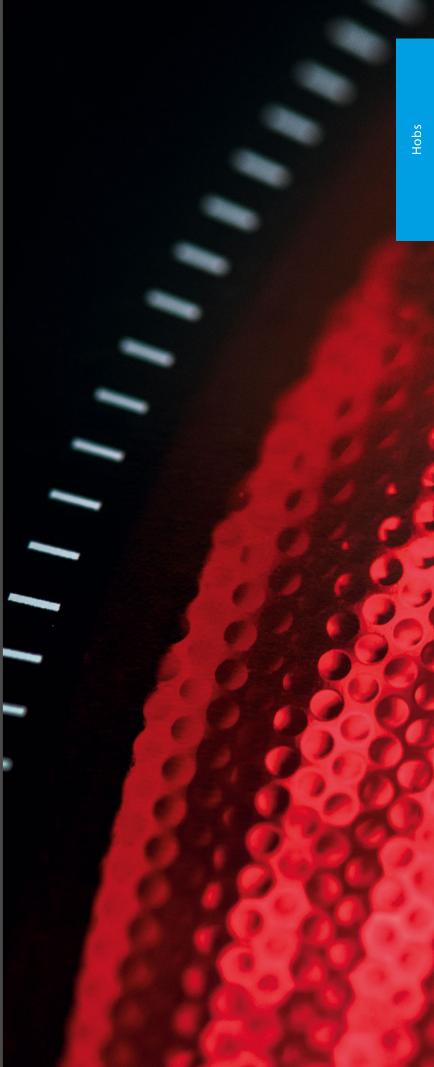

# GAS HOBS

Change the temperature at lightning speed – cooking on an open flame is direct, emotional and, thanks to the latest technology, completely safe. A Blaupunkt gas hob is an eye-catcher in the kitchen and delivers a truly professional cooking experience.





490▶

- Connected load, gas: 11.1 kW Burner with 5 cooking areas:
- Front left: Economy burner 1 kW
- Back left: Rapid burner 3 kW
- Mid: wok burner:3.6 kW
- Rear right: Standard burner 1.75 kW
- Front right: Standard burner 1.75 kW

- Black glass, hardened
- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas (LPG nozzle is included in the package)
- Connection cable 1 m

- Appliance dimensions:  $9.0 \times 90.0 \times 52.0$  cm
- Installation dimensions: 4.5 × 83.0 × 48.0 cm




460▶

- Connected load, gas: 8.1 kW Burner with 4 cooking areas:
- Front left: Triple burner 3.6 kW
- Back left: Standard burner 1.75 kW
- Rear right: Standard burner 1.75 kW
- Front right: Economy burner 1 kW

- Black glass, hardened
- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas (LPG nozzle is included in the package)
- Connection cable 1 m

- Appliance dimensions:  $9.0 \times 60.0 \times 51.5$  cm
- Installation dimensions:  $4.5 \times 56.0 \times 49.0$  cm

## Gas hob



490▶

- Connected load, gas: 11.1 kW
- Burner with 5 cooking areas:
- Front left: Economy burner 1 kW
- Back left: Rapid burner 3 kW
- Mid: wok burner: 3.6 kW
  Rear right: Standard burner 1.75 kW
- Front right: Standard burner 1.75 kW

- Stainless steel
- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas (LPG nozzle is included in the package)
- Connection cable 1 m

- Appliance dimensions: 9.0 × 86,0 × 51.0 cm
- Installation dimensions: 4.5 × 81.5 × 49.0 cm

# Gas hob



460▶

- Connected load, gas: 8.1 kW Burner with 4 cooking areas:
- Front left: Triple burner 3.6 kW
- Back left: Standard burner 1.75 kW
- Rear right: Standard burner 1.75 kW • Front right: Economy burner 1 kW

- Stainless steel
- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas
- (LPG nozzle is included in the package)
- Connection cable 1 m

- Appliance dimensions: 9.0 × 59.0 × 51.0 cm
- Installation dimensions: 4.5 × 56.0 × 49.0 cm













# HOBS WITH INTEGRATED EXTRACTOR

The modern extractor solution offers one thing above all – more freedom: A clear view, as the fumes are extracted directly where they arise. Odourless cooking and more freedom in kitchen planning.

High-quality filter systems allow nothing but fresh air to be produced, while still being powerful and noise-free. The perfect combination of heat and air in a single appliance.

# Perfectly planned – Hob with an extractor fan

Perfect integration in the kitchen cabinet makes integrated design and maximum functionality possible in the first place. Thanks to the slim and space-efficient design, the appliances allow a greater use of your cabinet and drawer spaces.



# **SHORTER DISTANCE - MORE EFFI-CIENT EXTRACTION - FRESHER AIR**

The downdraft extractor ensures that cooking fumes do not even escape to the room and are instead filtered directly.



# **EFFICIENT TECHNOLOGY -MAXIMIZED PERFORMANCE**

Optimized extraction paths, powerful motors and a perfectly balanced flow rate ensure maximum performance.



# **BETTER POSITIONING -ENJOYABLE COOKING**

The intelligent fusion of a hob and extractor fan saves you from an unfavourable eye-level appliance position. Thanks to the direct downdraft extraction of the fumes, you keep a clear view.



# **FEWER APPLIANCES -PLANNING WITHOUT LIMITS**

The absence of the additional appliance at head height opens up new possibilities in kitchen planning. Positioning the hob in the centre of the room or directly in front of the window allows you a clear view: no more limits stand in your way.



# **EASIER TO ACCESS -EASIER TO CLEAN**

The filter technology ensures excellent absorption of moisture. To clean, you can access the filters easily and practically from above, rendering a tedious disassembly unnecessary.



# **RELAXING COOKING EXPERIENCE**

Installation at base height shifts the sound field from the eye level downwards. Especially quiet motors give you additional peace and quiet.



# **OUALITY FROM SELECTION TO** WORKMANSHIP

Functionality and longevity are the result of the use of high-quality materials and precise workmanship.



Here you can find all information about our hob fans.

## Stand-alone hob, induction with integrated extractor fan





- Voltage: 220 240 V
- Total connected load: 8.8 kW
- 4 induction cooking zones with booster: 4 cooking zones Ø 22 cm, 2.1 kW (3.7 kW)

- Frameless
- Touch control with Smart Slider
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- · Main switch for hob and extractor fan
- Toggle function with fixed temperatures (40°C, 70°C und 98°C)
- Cooking Chef Mode, Pause and Recall
- Residual heat display
- Pot detection
- Child lock • Timer
- Countdown function
- 2× bridging function
- Flush-mounted installation possible

- Appliance dimensions:  $82.7 98.2 \times 90 \times 53 \text{ cm}$
- Installation dimensions: 5.8 × 86.2 × 49.5 cm

- Air outlet/exhaust air duct to the left
- It is not possible to plan in dishwashers, underframe coolers, base drawers, etc. in the exhaust air routing area
- For the circulation variant, it is not possible to plan in dishwashers, underframe coolers, base drawers, etc. directly on the left side
- Min. cabinet width 900 mm
- Worktop depth min. 600 mm (correspondingly deeper for the planning of recess panelling)
- Plint height min. 100 mm

- Voltage: 220 240 V
- Total connected load: 165 W
- Average power consumption: 30.8 kWh/year
- Noise min./max. normal level/intensive level: min 45 dB (A) max. 65 dB (A) max. 70 dB (A)
- Fan output max. normal level/intensive level\*: In extraction mode 580 m<sup>3</sup>/h/730 m<sup>3</sup>/h In circulation mode 45 m<sup>3</sup>/h/560 m<sup>3</sup>/h

- Electronic opening of the extractor fan
- Suitable for installation in a kitchenette or kitchen island
- Optional extraction or circulation mode (for circulation mode a carbon filter is required)
- 6-level fan output controllable via Touch Control with 7-segment LED display
- 5 power levels + 1 intensive level
- Intensive level with automatic reset for extraction mode
- Automatic three-level blower overrun of 5 / 10 and 20 minutes with LED display
- Metallic grease filter and carbon filter saturation indicator via LED warning light
- For the cleaning / emptying of metallic filters and water collection vessels, the appliance automatically blocks after
- Automatic overrun for circulation mode
- Water collection tank: 0.75 litre capacity
- Powerful and guiet blower
- Metallic grease filter, dishwasher-safe



power according to




# Multi control Blaupunkt Multi Control –

a unique connection

Here everything comes together that belongs together: Blaupunkt hobs with Multi Control 👨 form a unique combination – together with the Multi Control extractor fan hoods. These can be easily controlled using the hob operating panel, and they automatically adjust their output in line with the heat generation of the hob. The cable-free Multi Control sensor promises a long-lasting technical standard and intuitive operation.



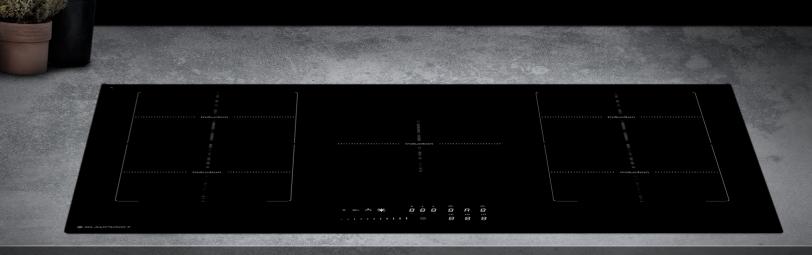





- Voltage: 220 240 V
- Total connected load: 150.4 W
- Average power consumption: 38.3 kWh/year\*
- Fan efficiency class: A\*
- Light efficiency class: B\*
- Grease filter efficiency class: E\*
- Noise min./max. Normal level: 40/65 dB\* Fan output max. Normal level/Intensive level\*:
- In extraction mode 490 m<sup>3</sup>/h/700 m<sup>3</sup>/h
- In circulation mode 300 m³/h/400 m³/h

- Stainless steel
- For ceiling installation above kitchen islands
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Filter saturation display
- Powerful and quiet blower
- Uniform, bright lighting with 2 × 2.7 W LED
- Optional extendible Multi Control function: with adjustable brightness and colour temperature
- Illuminance: 111 Lux
- Colour temperature: 4,000 K preset
- Metal grease filter, dishwasher-safe

• Appliance dimensions: max.  $19.2 \times 90.0 \times 49.9 \,\mathrm{cm}$ 

## Wall hood



- Voltage: 220 240 V
- Total connected load: 225.4W
- Average power consumption: 44 kWh/year\*
- Noise min./max. normal level: 48/58 dB\*
- Fan output max. normal level/intensive level\*: • In extraction mode 560 m<sup>3</sup>/h/632 m<sup>3</sup>/h
- In circulation mode 394 m<sup>3</sup>/h/445 m<sup>3</sup>/h

- Stainless steel
- For wall installation above cooking zones
- Multi Control
- Optional extraction or circulation mode (for circulation mode a carbon filter is required)
- 4-level fan output (3 power levels + 1 intensive level) controllable via Multi Control
- Intensive levels with automatic reset • Powerful and quiet blower
- Uniform, bright lighting with 2 × 2.7 W LED
- Optional extendible Multi Control function:
- with adjustable brightness and colour temperature
- Heat sensor for automatic mode
- Colour temperature 4,000 K preset
- Metallic grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: 64.0 – 106.0 × 90.0 × 48.0 cm
- Appliance dimensions, circulation:  $71.0 - 113.0 \times 90.0 \times 48.0 \text{ cm}$

## Wall hood

# 5DB 69850AU New



- Voltage: 220 240 V
- Total connected load: 342 W
- Average power consumption: 47 kWh/year\*
- Noise min./max. normal level: 59/74 dB\*
- Fan output max. normal level/intensive level\*:
- In extraction mode 780 m<sup>3</sup>/h/880 m<sup>3</sup>/h
- In circulation mode 480 m<sup>3</sup>/h/500 m<sup>3</sup>/h

- Black Powder coating
- For wall installation above cooking zones
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- 4-level fan output (3 power levels + 1 intensive
- level) controllable via Soft keys
   Uniform, bright lighting with 2×1 W LED lamps
- Illuminance: 150 Lux
- Colour temperature: 3,000 K
- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction:  $79.0 - 106.0 \times 90.0 \times 45.0 \,\mathrm{cm}$
- Appliance dimensions, circulation:  $79.0 - 106.0 \times 90.0 \times 45.0 \text{ cm}$

# Wall hood






- Voltage: 220 240 V
- Total connected load: 135 W
- Average power consumption: 72.5 kWh/year\*
- Fan efficiency class: E\*
- Light efficiency class: A\*
- Grease filter efficiency class: C\*
- Noise min./max. Normal level: 53/64dB\* Fan output max. Normal level:
- In extraction mode max. 380 m<sup>3</sup>/h
- In circulation mode max. 235 m<sup>3</sup>/h

- Stainless steel
- For wall installation above cooking zones
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- 3-level fan power controllable via push buttons • Uniform, bright lighting with 2 × 5 W LED lamps
- Illuminance: 900 Lux
- Colour temperature: 3,000 K
- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: 66.0 – 101.5 × 90.0 × 47.0 cm
- Appliance dimensions, circulation:  $79.0 - 101.5 \times 90.0 \times 47.0 \,\mathrm{cm}$

## Flat hood





460▶

- Voltage: 220 240 V
- Total connected load: 118 W
- Average power consumption: 38.6 kWh/year\*
- Noise min./max. normal level: 54/67 dB\* Fan power\*
- In extraction mode max. 340 m<sup>3</sup>/h
- In circulation mode max. 120 m<sup>3</sup>/h

- Optional extraction or circulation mode (activated carbon filter required for circulation mode)
- For wall cabinet 60 cm
- Telescopic extension without panel
- Panel from original light strip from kitchen furniture manufacturer
- 3-level fan output controllable via slide switch
- Automatic switch-on and switch-off by pressing the moving filter surface
- Uniform, bright lighting with 2×4W LED lamps
- Illuminance: 100 Lux
- Colour temperature 3,000 K
- Metallic grease filter, dishwasher-safe

• Appliance dimensions: 19.6 × 59.8 × 26.0 cm

### Flat hood





- Voltage: 220 240 V
- Total connected load: 118W • Average power consumption: 38.6 kWh/year\*
- Noise min./max. normal level: 54/67 dB\* Fan power\*
- In extraction mode max. 340 m<sup>3</sup>/h
- In circulation mode max. 120 m<sup>3</sup>/h

- Optional extraction or circulation mode (activated carbon filter required for circulation mode)
- For wall cabinet 90 cm
- Telescopic extension without panel
- Panel from original light strip from kitchen furniture manufacturer
- 3-level fan output controllable via slide switch
- Automatic switch-on and switch-off by pressing the moving filter surface

• Metallic grease filter, dishwasher-safe

- Uniform, bright lighting with
- 2×4W LED lamps
- Illuminance: 100 Lux • Colour temperature 3,000 K
- Appliance dimensions: 19.8 × 89.8 × 28.0 cm



















## Fan module





- Voltage: 220 240 V
- Total connected load: 168 W
- Average power consumption: 44.7 kWh/year\*
- Noise min./max. normal level: 47/63 dB (A)\*
- Fan output max. normal level/intensive level\*:
- In extraction mode max. 590 m<sup>3</sup>/h

- Optional extraction or circulation mode (starter set required for circulation mode)
- For wall cabinet 60 cm
- Fan power 3-level adjustable by mechanical sliding switch
- Powerful and quiet blower
- Even, bright illumination with 2×4W LED lamps
- Color temperature: 4,000 K
- Metallic grease filter, dishwasher-safe (aluminium)

• Appliance dimensions: 33.75 × 52.2 × 28.6 cm

## Fan module





- Voltage: 220 240 V
- Total connected load: 168 W
- Average power consumption: 44.7 kWh/year\*
- Noise min./max. normal level: 47/63 dB\*
- Fan output max. normal level/intensive level\*:
- In extraction mode max. 590 m<sup>3</sup>/h

- Optional extraction or circulation mode (starter set required for circulation mode)
  • For wall cabinet 90 cm
- Fan power 3-level adjustable by mechanical sliding switch
- Powerful and quiet blower
- Even, bright illumination with 2×4W LED lamps
- Colour temperature: 4,000 K
- Metallic grease filter, dishwasher-safe (aluminium)

• Appliance dimensions: 33.75 × 70.2 × 28.6 cm

## Fan module





- Voltage: 220 240 V
- Total connected load: 168 W
- Average power consumption: 44.7 kWh/year\*
- Noise min./max. normal level: 47/63 dB (A)\*
- Fan output max. normal level/intensive level\*:
- In extraction mode max. 590 m<sup>3</sup>/h

- Optional extraction or circulation mode (starter set required for circulation mode)
- For wall cabinet 60 cm
- Fan power 3-level adjustable by mechanical sliding switch
- Powerful and quiet blower
   Even, bright illumination with 2×4W LED lamps
- Illuminance: 100 Lux
- Color temperature: 4,000 K
- Metallic grease filter, dishwasher-safe (aluminium)

• Appliance dimensions: 33.75 × 52.2 × 28.6 cm

## Fan module





- Voltage: 220 240 V
- Total connected load: 168 W
- Average power consumption: 44.7 kWh/year\*
- Noise min./max. normal level: 47/63 dB\*
- Fan output max. normal level/intensive level\*:
- In extraction mode max. 590 m<sup>3</sup>/h

- Optional extraction or circulation mode (starter set required for circulation mode)
- For wall cabinet 90 cm
- Fan power 3-level adjustable by mechanical sliding switch
- Powerful and quiet blower
- Even, bright illumination with 2×4W LED lamps
- Illuminance: 100 Lux
- Colour temperature: 4,000 K
- Metallic grease filter, dishwasher-safe (aluminium)

• Appliance dimensions: 33.75 × 70.2 × 28.6 cm

# Fan module







- Voltage: 220 240 VTotal connected load: 254 W
- Average power consumption: 96.1 kWh/year\*
- Noise min./max. normal level: 57/71 dB\*
- Fan output max. normal level/intensive level\*: In extraction mode 600 m<sup>3</sup>/h/680 m<sup>3</sup>/h

- Fan module with white glass
- Optional extraction or circulation mode (starter set required for circulation mode)
- Soft push buttons (3 power levels + 1 intensive level)
- Intensive levels with automatic reset
- High, fine-tunable fan output via electronic control
- Edge suction
- Uniform, bright lighting with 2×1W LED lamps
- Illuminance: 200 Lux
- Colour temperature 3,000 K
- Metallic grease filter, dishwasher-safe

- Appliance dimensions, extraction: 33.0 × 86.0 × 30.0 cm
- Appliance dimensions, circulation: 33.0 × 86.0 × 30.0 cm












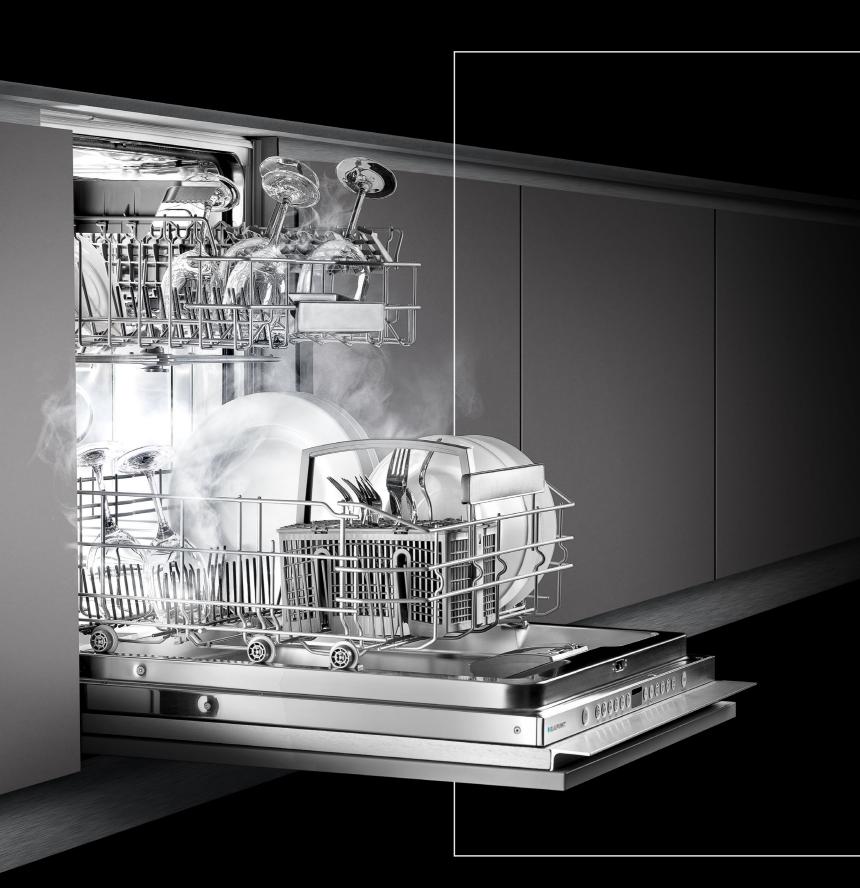

# DISHWASHER

First the pleasure, then the work?

Blaupunkt dishwashers take over the work for you, so you can keep having fun when the feast is over. Different installation heights and a wide, variable storage space: the Blaupunkt range has the right helper for every space need.

## Built-in dishwasher, semi integrated









- Energy efficiency class: 3,5 star
- Water consumption class: 4.5 star
- Capacity: 14 standard place settings
- Energy/water<sup>1)</sup>: 265 kWh/3,500 l
- Energy/water<sup>2)</sup>: 0.71 kWh/12.51
- Noise: 49 dB (A) re 1 pW
- Connected load: 220 240 V

- 6 programs: Intensive, Heavy, Eco, Glass, 90 min., Rapid
- Type of control: Electronic Control
- Type of display: LED light
  Power of heat element (230 V): 1.800 W
- Timer pre-setting 3h/6h/9h
- Push button functions: Power, Program, Delay, Option,
- Functions of Indicator: Rinse Aid, Delay time, Power wash,program, Extra drying

  • Type of heating element: Hidden
- Filter type: Main filter/Coarse filter/Fine filter
- Filter material: Plastic + stainless steel
- Tub material: Stainless steel
- Aquastop
- Cutlery drawer

- Appliance dimensions:  $81.5 \times 59.8 \times 57.0$  cm
- Recess dimensions:  $81.5 \times 59.8 \times 57.0$  cm
- for 280 standard clean-ing cycles with cold water filling (for energy
- washing cycle with cold water filling (for energy consumption: including consumption by operpower consumption).
  Actual consumption

## Built-in dishwasher, fully integrated













- Energy efficiency class: 3,5 star
- Water consumption class: 4.5 star
- Capacity: 14 Standard place settings
- Energy/water<sup>1)</sup>: 265 kwh/3.556 l
- Energy/water<sup>2)</sup>: 0.71 kWh/10.51
- Noise: 49 dB (A) re 1 pW
- Voltage: 220 240 V

- 8 programs: Auto, Intensive, Heavy, ECO, Glass, 90 min, Rapid, Soak
- Type of control: Electronic Control
- Type of display: LED light
- Power of heat element (230 V): 1.800 W
- Timer pre-setting 1 24 h
- Push button functions: Power, Program, Delay, Extra drying
- Functions of Indicator: Rinse Aid, Program end, Delay time / remaning time, program, Extra drying
- Type of heating element: Hidden
- Filter type: Main filter/Coarse filter/Fine filter
- Filter material: Plastic + stainless steel • Tub material: Stainless steel
- Aquastop
- Cutlery drawer

- Dimensions H × W × D

   Appliance dimensions: 81.5 × 59.8 × 55.0 cm
- Built-in dimensions: 81.5 × 59.8 × 55.0 cm

# Free-standing dishwasher



- Energy efficiency class: 3 star
- Water consumption class: 4.5 star
- Capacity: 12 standard place settings
- Energy/water<sup>1)</sup>: 265 kWh/2.940 l
- Energy/water<sup>2)</sup>: 0.73 kWh/10.51
- Noise: 49 dB (A)
- Connected load: 220 240 V

- 6 programs: Intensive, Heavy, ECO, 90 min, Rapid, Glass
- Type of display: LED light
- Power of heat element (230 V): 1.800 W
- Timer pre-setting: 3/6/9h
- Push button functions: Power, Program, Delay, Option, Start/Pause
- Functions of Indicator :Rinse Aid, Delay time, Half loadfunctions, program, Extra drying
- Type of heating element: Hidden
- Filter type: Main filter/Coarse filter/Fine filter
- Filter material: Plastic + stainless steel
- Tub material: Stainless steel
- Aquastop
- Cutlery basket in lower basket

• Appliance dimensions:  $84.5 \times 60.0 \times 59.8 \, \text{cm}$ 

# Free-standing dishwasher













- Energy efficiency class: 3 star
- Water consumption class: 4.5 star
- Capacity: 12 standard place settings • Energy/water<sup>1)</sup>: 265 kWh/2.940 l
- Energy/water<sup>2)</sup>: 0.73 kWh/10.51
- Noise: 49 dB (A)
- Connected load: 220 240 V

- 6 programs: Intensive, Heavy, ECO, 90 min, Rapid, Glass
- Type of display: LED light
- Power of heat element (230 V): 1.800 W
- Timer pre-setting: 3/6/9h
  Push button functions: Power, Program, Delay, Option, Start / Pause
- Functions of Indicator :Rinse Aid, Delay time, Half loadfunctions ,program, Extra drying

  Type of heating element: Hidden

  Filter type: Main filter/Coarse filter/Fine filter

- Filter material: Plastic + stainless steel
- Tub material: Stainless steel
- Aquastop
- Cutlery basket in lower basket

• Appliance dimensions:  $84.5 \times 60.0 \times 59.8$  cm









# REFRIGERATIONS

The various cooling zones in Blaupunkt refrigerations and freezers create the right temperature for all chilled items. Perfectly kept food retains its freshness for a long time, thanks to different temperature zones and electronic control.



## Cold 51

# Built-in refrigeration / freezer combination

# 5CR 288FE0AU New

No frost



- Energy efficiency class: 3 star
- Energy consumption: 280 kWh/yearTotal capacity: 2421
- Noise: 41 dB (A) re 1 pW
- Climate class: N-T
- Connection loads: 220 240 V / 90 W

- Fully integrated installation
- Fully automatic defrost inside the fridge
- Easy-to-clean, bright interior
- LED interior lighting in refrigeration compartment
- Electronic temperature control with precise digital reading
- Refrigeration compartment

- Refrigeration: Capacity 1801
  4 shelves made of safety glass,
  of which are height-adjustable
- Transparent Vario tray for fruit and vegetables,
- covered by a safety glass panel
- 4 full-width door shelves
- Bottle rack
- Egg tray

# \*\*\*\* - Freezer compartment -18 °C and lower

- 3 frozen produce drawers
- Capacity 63 l
- No Frost
- Freezing capacity: 3.3 kg in 24 hours
- Storage time in case of malfunction: 8 hours
- Frozen produce calendar

- Drag hinge Door hinged on right, changeable
- Appliance dimensions: 177.0 × 54.0 × 54.5 cm
- Recess dimensions:  $177.6 \times 56.0 \times 55.0$  cm

# Free-standing Side-by-side refrigeration / freezer combination

# 5SB 892SE0AU New







- Energy efficiency class: 4 star
- Energy consumption: 442 kWh/yearTotal capacity: 592 l
- Noise: 39 dB (A) re 1 pW
- Climate class: T
- Connection loads: 220 240 V / 196 W

- Free-standing side-by-side refrigeration/freezer combination
- Dark Steel design
- Handleless design
- Separate temperature control for refrigerator and freezer compartment
- Fully automatic defrosting in the refrigerator compartment
- Easy-to-clean, bright interior
- LED interior lightingElectronic temperature control readable via LED
- Water dispenser with watertank

- Refrigeration: Capacity 3671
- 3 shelves made of safety glass, 2 of which are height-adjustable
- 3 transparent storage drawers
- 4 door shelves
- Egg tray

# \*\*\*\* - Freezer compartment -18 °C and lower


- Capacity 225
- 3 shelves made of safety glass, 2 height-adjustable
- 3 freezer drawers • No Frost
- Freezing capacity: 13 kg in 24 hours
- Storage time in case of malfunction: 11 hours
- Super freezing with automatic freeze

- Door stop right and left
- Appliance dimensions:  $177.0 \times 91.0 \times 73.0 \text{ cm}$





# BLAUPUNKT SINKS

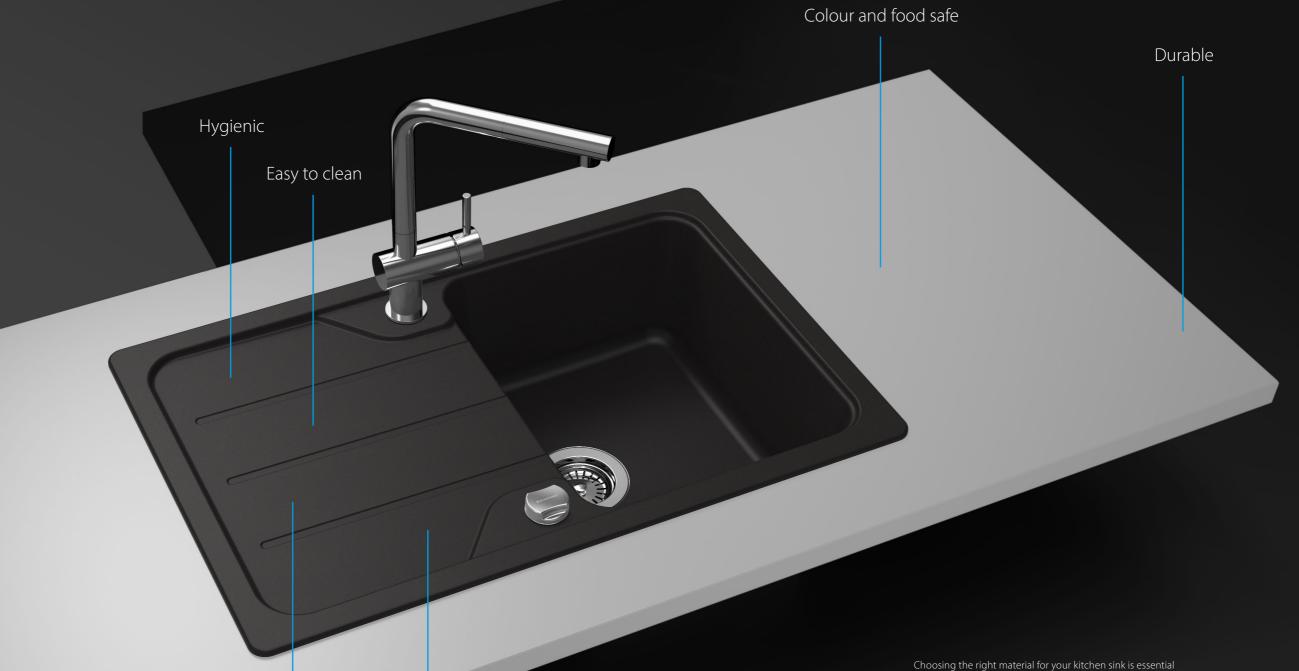

Heat resistant

Scratch resistant

to ensuring that you enjoy using it for years to come. Because of this, all Blaupunkt sinks are manufactured of highly robust quartz composite. It consists of 80 % natural quartz sand – the hardest component that makes up granite – and 20 % acrylic resin. The surfaces of the sinks are slightly rough, but not porous – they feel like stone, yet warm.

New



**√75**▶

- Black Granite
- Quarz composite
- Surface-mounted
- 3 1/2" strainer insert as pop-up operation
- Tap ledge
- With drill holes for tap and pop-up drain


• Synthetic overflow set (without siphon)

- Cabinet from 80 cm
- Sink overall 750 × 456 mm

• Basin (2×) 333 × 400 × 200 mm

Sink

New



**√75**▶

- Black Granite
- Quarz composite
- Surface-mounted
- 3 1/2" strainer insert as pop-up operation
- Tap ledge
- With drill holes for tap and pop-up drain

• Synthetic overflow set (without siphon)

- Cabinet from 80 cm
- Sink overall 756 × 456 mm
- Basin  $700 \times 400 \times 180 \,\text{mm}$

Sink

New



1100▶

- Black Granite
- Quarz composite
- Surface-mounted
- 31/2" strainer insert as pop-up operation
- Tap ledge
- With drill holes for tap and pop-up drain

• Synthetic overflow set (without siphon)

- Cabinet from 60 cm
- Sink overall 1000 × 500 mm
- Basin 480 × 420 × 190 mm

New



486 ▶

- Black Granite
- Quarz composite
- Surface-mounted
- 3 1/2" strainer insert as pop-up operation
- Tap ledge
- With drill holes for tap and pop-up drain

• Synthetic overflow set (without siphon)

- Cabinet from 50 cm
- Sink overall  $860 \times 500 \, \text{mm}$
- Basin 335 × 420 × 190 mm

New



**√57**▶

- Black Granite
- Quarz composite
- Surface-mounted
- 3 1/2" strainer insert as pop-up operation
- Tap ledge
- With drill holes for tap and pop-up drain

• Piletta e scarico (senza sifone)

- Cabinet from 60 cm
- Sink overall  $570 \times 510 \, \text{mm}$
- Basin 514 × 358 × 180 mm













# BLAUPUNKT ADDITIONAL ACCESSORIES

Adapt your use and increase the functionality of your appliance with our selection of additional accessories.





Teppanyaki plate

5Z 99GP01AU

57 99TP01 ALL

 $H \times W \times D$   $40.8 \times 24.0 \times 5$  cm incl. handle  $40.8 \times 24.0 \times 2.1$  cm without handle


Compatible with all Blaupunkt hobs

It's every barbecue fan's dream: It may be raining, snowing or stormy outside – he can still indulge his passion inside. With the cast iron barbecue grill or the Teppanyaki grill, steaks, fish and vegetables get that familiar aroma from the open-air barbecue season.



58 59

# Special accessories for ovens



Multi-use wire shelf

5Z 10CR10X0

Compatible with

5B20N 0290AU




Universal pan

5Z 36BA50

Compatible with

5B36N 0250AU 5B30N 0250AU 5B36P 0250AU 5B20N 0290AU



Multi-use wire shelf

5Z 36CR10X0

Compatible with


5B36N 0250AU 5B30N 0250A 5B36P 0250AU



Enamelled baking tray

5Z 50CB10E0

5B50P 8690AU
5B50P 8590AU
5B50N 8690AU
5B50N 8590AU
5C90S 8990AU



Multi-use wire shelf

5Z 50CR10X0

Empatible with

5B50P 8690AU

5B50P 8590AU

5B50N 8690AU

5B50N 8590AU

5C90S 8990AU



Air Fry Insert

5Z 50AF10E0

5B50P 8690AU




Universal pan

5Z 94CB10E0

Compatible with

5BC 93190AU


5BC 94190AU



Multi-use wire shelf

5Z 94CR10X0






Universal pan

5Z 91CB10E0

Compatible with

5RC 91490AU 5RC 92490AI




Multi-use wire shelf

5Z 91CR10X0

Compatible with

5RC 91490AU 5RC92490AL



Telescopic extension rail

5Z 50CU10E0

Compatible with 5B50P 8690AU 5B50P 8590AU

5B50N 8690AU 5B50N 8590AU



Telescopic extension rail

5Z 36VC50

Compatible with

5B36P 0250AU 5B30N 0250A



Steamer insert (stainless steel)

5Z 50CS10E0

Compatible with

5C90S 8990AU



Temperature probe

5Z 50TE10E1

Compatible with

2C902



Temperature probe

5Z 50TE10E0

Compatible with 5B50P 8690AU

Compatible with

EDEON 0600 AI

Top panel, black
5Z 50BL10E0

All


All ovens

# Accessories for hobs with integrated extraction



Wall box with stainless steel external vent

Compatible with



Base ventilation grille

FK 150 plastic

Compatible with

5IX 99290AU



Connector 15° curve

- horizontal -FK 113 plastic

5IX 99290AU



Coupling

FK 110 plastic

Compatible with

Compatible with



Connector 90° elbow

- horizontal -

5IX 99290AU

Compatible with



Connector 90° elbow – vertical –

Compatible with

5IX 99290AU



Flat duct


**Compatible with** 



Kit for right air outlet

5Z 9104X1

Compatible with



**Activated carbon filter** 

5Z 9105X1

Compatible with



Filter box for base installation

5Z 9405X1

5Z 9406X1


Compatible with



Replacement filter for filter box

Filter can be cleaned and reused


# Special accessories for extractor fan hoods



Stainless steel metallic grease filter

5Z 9203X1

Compatible with 5DB 69253AU




**Activated carbon filter** 

5Z 9102X1

Compatible with

5DB 69253AU



Metal panel

5Z 5750N0

Compatible with



Metal panel (black)

5Z 5750B0


Compatible with



**Activated carbon filter** 

5Z 9121X1

Compatible with



**Activated carbon filter** 

5Z 9100X1


Compatible with

5DW 69750AU

Long-life activated carbon filter

5Z 9135X1

Compatible with



**Activated carbon filter** 


5Z 9114X1

5DB 69850AU

Compatible with




echnical Drawings




Suitable for oven TU

5B50P 8690AU	5B50P 8590AU
5B50N 8690AU	5B50N 8590AU




Suitable for oven BU

5B50P 8690AU	5B50P 8590AU
5B50N 8690AU	5B50N 8590AU




Suitable for oven TU

5B36P 0250AU	5B36N 0250AU	
5B30N 0250AU		




Suitable for oven BU

5B36P 0250AU	5B36N 0250AU
5B30N 0250AU	



Suitable for oven TU


5B20N 0290AU



Suitable for oven BU


5B20N 0290AU


# Compact appliances



Suitable for oven TU

5BC 93190AU 5BC 94190AU






Suitable for compact appliance

5KD 94150AU

# Warming drawer

Technical drawings



Suitable for warming drawer


5WS 16400AU

Microwaves

Suitable for microwave TU

5MA 27500AU 5MG 17190AU


# Range Cooker



Suitable for range cooker | free-standing


5RC 91490AU 5RC 92490AU

# Hobs




Suitable for hob | induction, stand-alone

5II 94291AU




Suitable for hob | induction, stand-alone

5IE 84252AU




Suitable for hob | induction, stand-alone

5IE 64252AU




Suitable for compact appliance

5C90S 8990AU




Suitable for hob | stand-alone

5RG 94350AU



Suitable for hob | stand-alone


5RE 64361AU



Suitable for hob | stand-alone


5RZ 34411AU

# Gas hobs




Suitable for gas hob

5GB 62191AU



Suitable for gas hob

5GB 61151AU




Suitable for gas hob

Ceiling fans


5GB 91250AU

# Downdraft



Stand-alone hob, integrated extractor fan

5IX 99290AU




Suitable for ceiling fan

5DD 72555AU

# Wall flues


Suitable for gas hob

5GB 92290AU




Suitable for wall flue

5DB 69253AU



Suitable for wall flue


5DB 69850AU



Suitable for wall flue


5DW 69750AU

# Flat Hood Fan module




Suitable for flat hood

5DA 39258AU



Suitable for flat hood


5DA 36258AU



Suitable for flat hood


5DA 15260AU 5DA 15160AU 5DA 17260AU 5DA 17160AU

# Dishwashers




Suitable for fan module

5DA 49450AU




Suitable for dishwasher | fully integrated

5VI 311AU



Suitable for dishwasher | fully integrated

5VF 421AU




Suitable for dishwasher | free-standing

5VS 401AU

5VS 501AU


Technical drawings

# Refrigerators

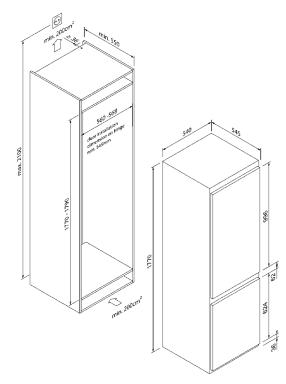

# Suitable for refrigerator

5CR 288FE0AU

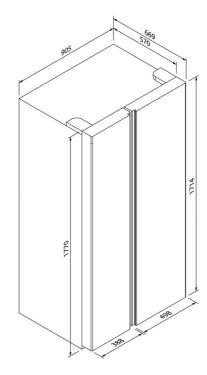



# Suitable for free-standing cooler

5SB 892SE0AU

Technical drawings

# Sinks







# Suitable for sink


Gavia SGG7690NE

# Suitable for sink

Fiora SFG7490NE







69

# Suitable for sink

Alento SAG9600CE

# Suitable for sink

Alento SAG8600CE

# Suitable for sink

Tesino STG5600CEA

# Heat | Air



## Smart slider

An intuitive, simple control concept for all appliances – every setting can be perfectly selected with the Smart





### **Touch Control**

Precise, innovative and very user-friendly: gently



## **Automatic programmes**

programmes are equipped for nearly every ingredient. Cooking can't get any easier.



# **Soft Moving**

door can be opened and closed smoothly. Just a light



# Steam cooking

Cooking with hot steam is gentle to the food, promises maximum taste and a healthy approach to your cooking.



# Pyrolyse

grilling at high temperatures are reduced to ashes that can be simply wiped away with a cloth.



Immediately hot, immediately cold, and nothing gets much less energy consumption.



# **Combi induction**

use of very large pots and pans. Of course, the two large



The extractor fan hood and hob are intelligently linked. using the hob control panel and automatically adjusts



## LED

The innovative LED lights of Blaupunkt extractor fan hope: the long-lasting lights consume an extremely low amount of energy.



## Air Fry

# Water



# **Cutlery drawer**



## Aquastop

safety system prevents all kinds of water damage whether on the supply hose or due to a leak in the



## Extra quiet



## Vario basket

The upper basket is height-adjustable and may be



# Digital display

selected programme and the cycle time.

# Cold



## **NoFrost**



## Super Freezing

down to -30°C so that newly stored food does not interrupt the freezing process.



## **Electronic control**



# LED light

The long-lasting LED lights are integrated flat in the side





# Service



By opting for Blaupunkt appliances, you have chosen a piece of premium kitchen equipment. Our professional service is available to assist you after the purchase. Our qualified employees are pleased to remain at your disposal. Our customer service experts for Blaupunkt integrated kitchen appliances will professionally answer all questions about the appliances. Here you can obtain all information on handling, functions and performance.

www.blaupunktau.com www.blaupunkt-einbaugeraete.com Blaupunkt integrated kitchen appliances / customer service, repair service, user support, spare parts and accessories.

Tel.: 1800 252 878 658 1800 BLAUPUNKT

customercare@blaupunktau.com



Register your new device on: blaupunktau.com

Nikpol Pty Ltd

www.nikpol.com.au 1300645765 sales@nikpol.com.au